


# MERIT LAUREATE®



A New Era in  
Hydrophilic  
Guide Wires

# A New Era

## MERIT'S COMMITMENT TO INNOVATION

A State of the Art Manufacturing Facility

Best in Class Engineering

Elite In-House Material Chemists

## DECISIONS DRIVEN BY EVIDENCE

Years of Research, Development and Quality Testing

Consistent Surface Coating Adhesion Tip to Tip

Enduring Lubricity

Exclusive Technology that Significantly Reduces Wire Whipping


## RELIABLE AND ENDURING LUBRICITY

Confidence to Navigate Highly Tortuous Vessels

High Performance, Consistent Surface Coating


Promotes Rapid Catheter Exchanges

Minimizes Friction on the Wire Surface

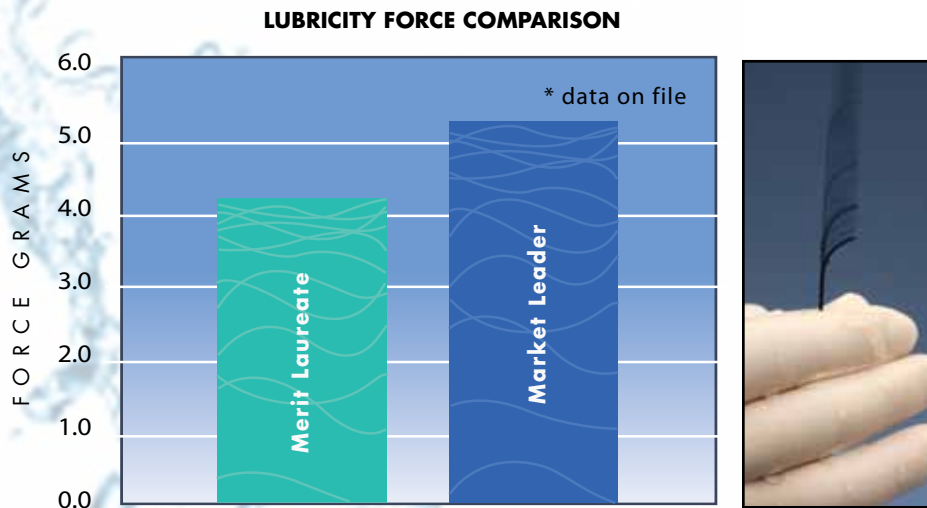


*Comparison testing against the market leader showed the Merit Laureate has a more lubricious surface with less drag force, thereby improving catheter compatibility.*

# in Hydrophilic Guide Wires

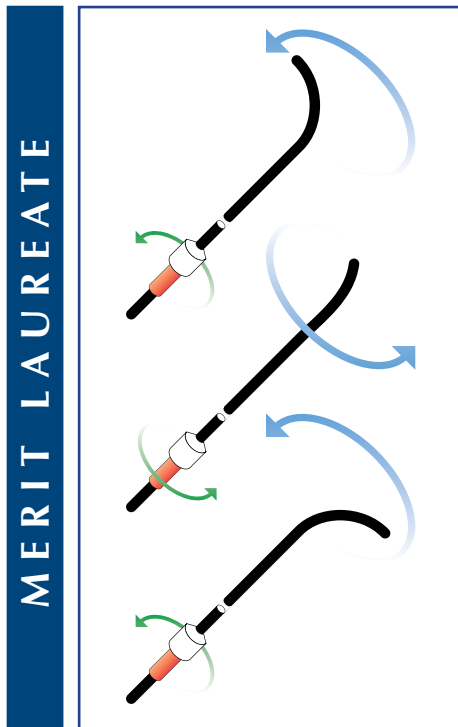


*The Merit Laureate shows definitive turn for turn responsiveness (1:1 torque)*

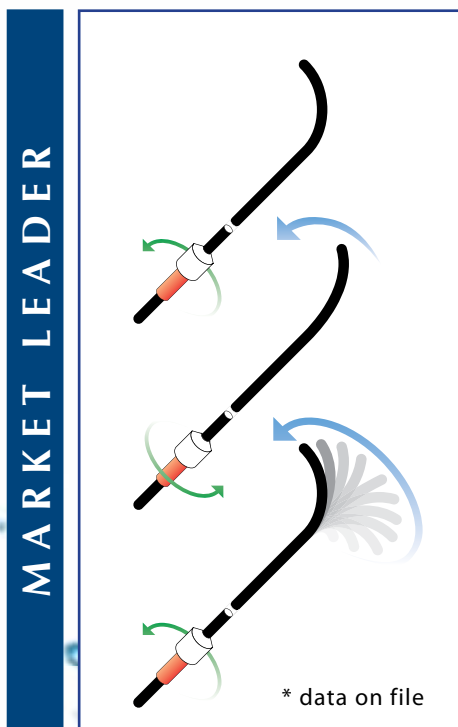

*The market leader shows a slow torque response followed by rapid exaggerated movement.*

## CLINICAL CRITERIA WITH THE PHYSICIAN IN MIND

- Exceptional Torque Control
- Greater Turn for Turn Responsiveness
- Rapid Vessel Selection
- Enhanced Lesion Crossability
- Dependable Visualization Under Fluoroscopy
- Stiff Configurations for Additional Support and Pushability

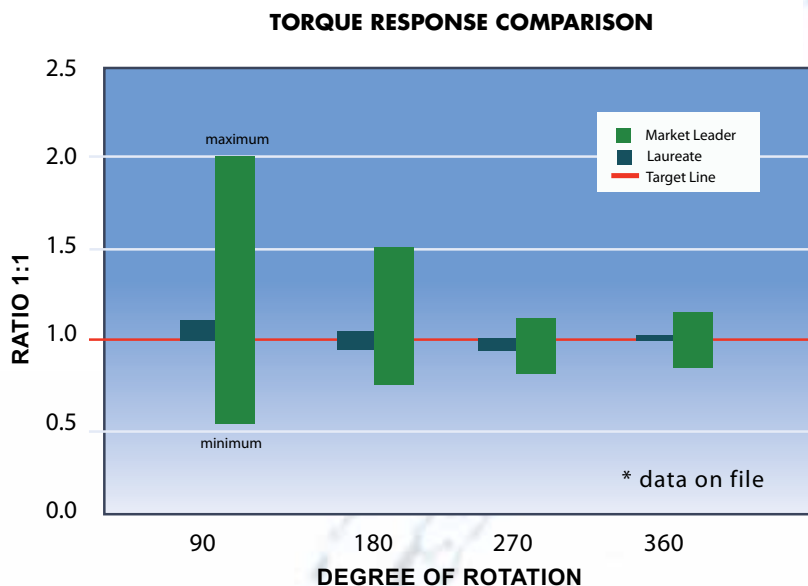

*Comparative torque testing shows the Merit Laureate guide wire consistently meets the 1:1 torque target.*

**Now the choice is clear**

## CATALOG NUMBERS:

### STANDARD HYDROPHILIC WIRES

Catalog Number	Configuration	Tip Shape	Diameter	Length
<b>LWSTDA3580</b>	Standard	Angled	0.035" (0.89mm)	80cm
<b>LWSTDA35150</b>	Standard	Angled	0.035" (0.89mm)	150cm
<b>LWSTDS35150</b>	Standard	Straight	0.035" (0.89mm)	150cm
<b>LWSTFA3580</b>	Stiff	Angled	0.035" (0.89mm)	80cm
<b>LWSTFA35150</b>	Stiff	Angled	0.035" (0.89mm)	150cm

### SPECIALTY HYDROPHILIC WIRES

<b>LWSTDA35180</b>	Standard	Angled	0.035" (0.89mm)	180cm	Exchange
<b>LWSTDA35260EX</b>	Standard	Angled	0.035" (0.89mm)	260cm	
<b>LWSTDS35180</b>	Standard	Straight	0.035" (0.89mm)	180cm	
<b>LWSTFA35180</b>	Stiff	Angled	0.035" (0.89mm)	180cm	Exchange
<b>LWSTFA35260EX</b>	Stiff	Angled	0.035" (0.89mm)	260cm	
<b>LWSTFS35180</b>	Stiff	Straight	0.035" (0.89mm)	180cm	
<b>LWSTFS35260EX</b>	Stiff	Straight	0.035" (0.89mm)	260cm	Exchange

Packaged 5 units per box

**\*Coming soon pending regulatory approval**

### SMALL DIAMETER SPECIALTY HYDROPHILIC WIRES\*

<b>LWSTDA1880</b>	Standard	Angled	0.018" (0.46mm)	80cm	Exchange
<b>LWSTDA18150</b>	Standard	Angled	0.018" (0.46mm)	150cm	
<b>LWSTDA18180</b>	Standard	Angled	0.018" (0.46mm)	180cm	
<b>LWSTDA18260EX</b>	Standard	Angled	0.018" (0.46mm)	260cm	
<b>LWSTDA25150</b>	Standard	Angled	0.025" (0.64mm)	150cm	Exchange
<b>LWSTDA25180</b>	Standard	Angled	0.025" (0.64mm)	180cm	
<b>LWSTDS25180</b>	Standard	Straight	0.025" (0.64mm)	180cm	
<b>LWSTDA25260EX</b>	Standard	Angled	0.025" (0.64mm)	260cm	

Packaged 5 units per box

\* Check with your local representative

